



FLUIDMASTER® 830 DUAL FLUSH VALVE INSTALLATION INSTRUCTIONS





INSTALL WITH CONFIDENCE

IMPORTANT: PRIOR TO INSTALLATION


- Turn off water.
- Flush toilet. Remove excess water with sponge.

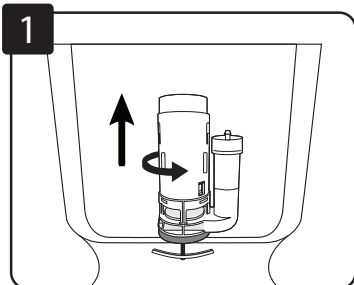

Remove. Clean tank.

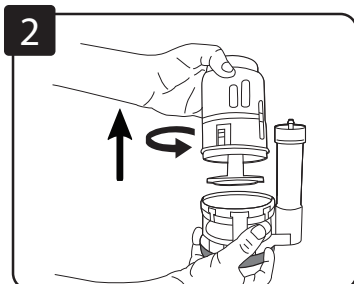




Install. Tighten until valve secure and not rocking. **DO NOT OVERTIGHTEN.**

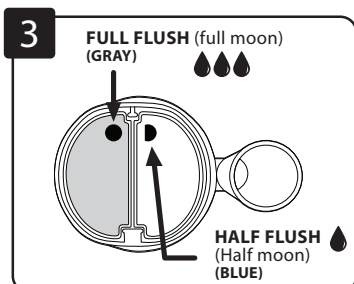


Align dual flush button with valve.

If Current Button Does Not Work:

Option 1 Use provided button rods.



Option 2 Buy new Fluidmaster button.

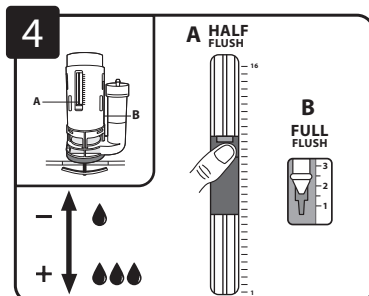

Full Flush: 3
Half Flush: 2.5



Insert refill tube.



30800 Rancho Viejo Road, San Juan Capistrano, CA 92675

www.Fluidmaster.com • 800-631-2011

Contact Fluidmaster for troubleshooting help or visit www.fluidmaster.com

M-F 5:30 am - 5:00 pm PST.

 WARNING



 DO NOT USE IN-TANK DROP-IN TOILET BOWL CLEANERS CONTAINING BLEACH OR CHLORINE. Use of such products will: (1) RESULT IN DAMAGE to tank components and MAY CAUSE FLOODING and PROPERTY DAMAGE and (2) VOID FLUIDMASTER WARRANTY.


FLUIDMASTER WARRANTY:
Fluidmaster Flush 'n Sparkle Toilet Bowl Cleaning System is recommended for those choosing to use in-tank bowl cleaners and WILL NOT VOID the FLUIDMASTER WARRANTY because it will not damage the components. DO NOT overtighten nuts or tank/bowl may crack. Always use quality Fluidmaster parts when installing or repairing. Fluidmaster will not be responsible or liable for use of non-Fluidmaster parts during installation or repair.

INSTRUCCIONES DE INSTALACIÓN DE LA VÁLVULA DE DESCARGA DUAL FLUIDMASTER® 830






INSTALE CON CONFIANZA

IMPORTANTE: ANTES DE LA INSTALACIÓN


- Cierre el agua.
- Descargue el sanitario. Remueva el exceso de agua con una esponja.



Remueva. Limpie el tanque.






Instale. Apriete hasta que la válvula esté segura y no se mueva. **NO APRIETE DEMASIADO.**

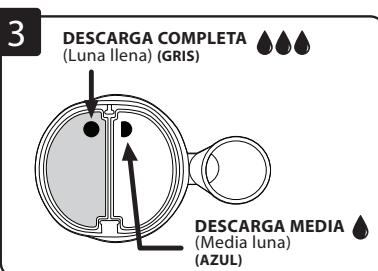


Alinee el botón de la descarga dual con la válvula.

Si El Botón Actual No Funciona:

Opción Utilice las barras de botón provistas.



Opción Compre un botón nuevo de Fluidmaster.

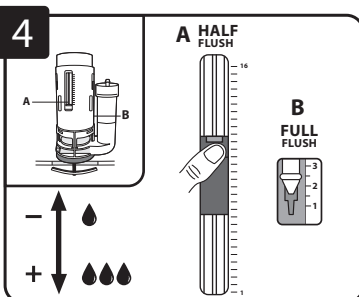

Descarga Completa: 3
Media Descarga: 2.5



Inserte la manguera de relleno.

⚠ ADVERTENCIA



NO USE LIMPIADORES DE TAZA DE INODORO QUE SE COLOQUEN EN EL TANQUE QUE CONTENGAN BLANQUEADOR O CLORO. El uso de tales productos: (1) GENERARÁ DAÑOS en los componentes del tanque y PODRÍA CAUSAR INUNDACIONES y DAÑOS MATERIALES, y (2) ANULARÁ LA GARANTÍA DE FLUIDMASTER.

Se recomienda el uso del sistema de limpieza de taza de inodoros Flush 'n Sparkle de Fluidmaster para quienes prefieran utilizar limpiadores de taza dentro del tanque y NO ANULARÁ LA GARANTÍA DE FLUIDMASTER porque no dañará los componentes. NO apriete demasiado las tuercas ya que el tanque y/o la taza se pueden agrietar. Siempre use piezas de calidad Fluidmaster al instalar o reparar. Fluidmaster no será responsable por el uso de repuestos que no sean de Fluidmaster durante la instalación o el mantenimiento.



30800 Rancho Viejo Road, San Juan Capistrano, CA 92675

www.Fluidmaster.com • 800-631-2011

Póngase en contacto con Fluidmaster para obtener ayuda en la solución de problemas o visite www.fluidmaster.com
De lunes a viernes de 5:30 a.m. a 5:00 p.m., hora estándar del Pacífico.